


SH 32IRP

Skill Tech 32" K- Shape Podium

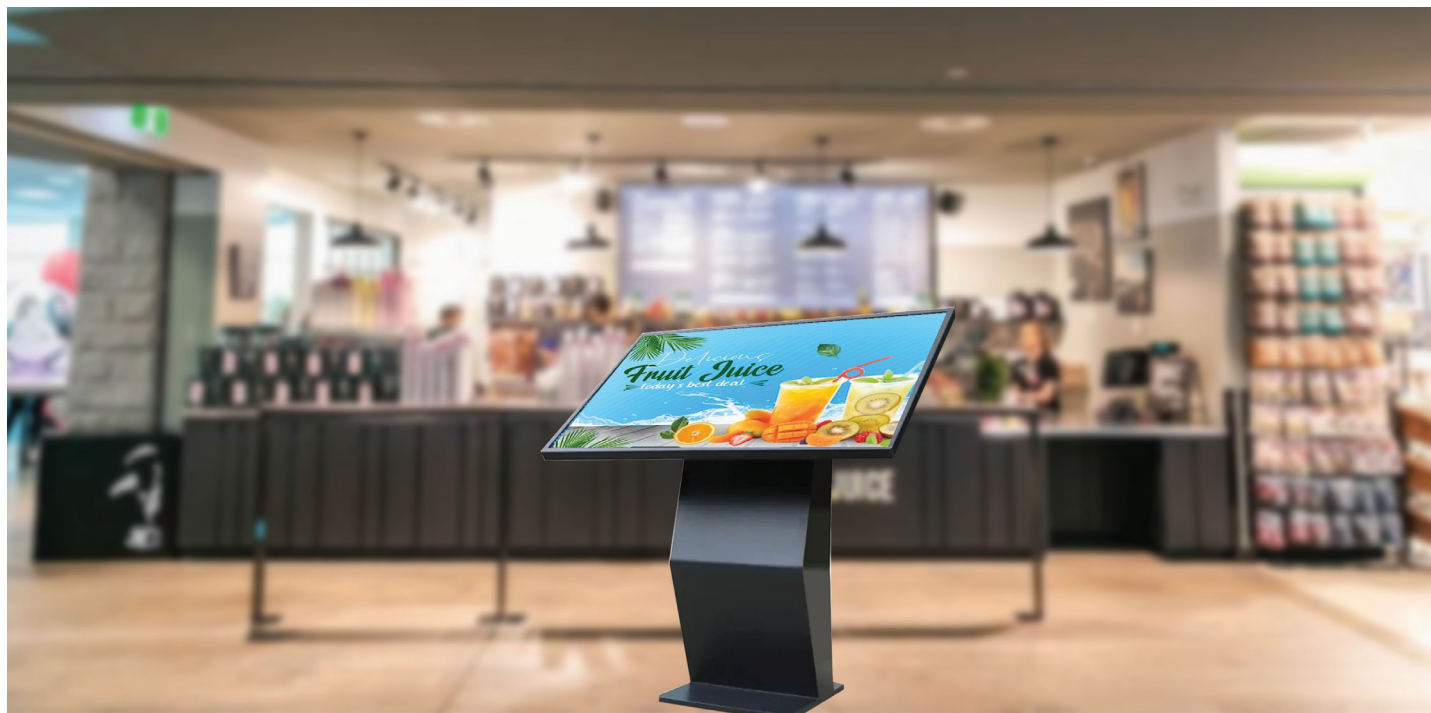

Panel Brand	Huaxing and Huike (default A-level screen), optional for BOE
Product Color	Silver/Black/White
Product Type	K-shape panel (supporting X86 motherboard, OPS box)
Display Size	32 inches (16:9)
Panel Type	LED LCD display screen
Physical Resolution	1920 * 1080 (standard)
Display Color	10bit, 1.07B

Refresh Rate	2K-60HZ
Brightness	Up to 350cd/m2
Contrast ratio	5000:1
Perspective (degree)	178°
Backlight lifespan	50000 hours
Touch Parameters	
Touch embedding method	Built in integrated, non external
Touch sensing	Infrared induction recognition touch technology (10 points)
Technology	
Writing Style	Fingers, touch pens or other non transparent objects with a diameter of not less than 5mm(multi-point 8mm)
Cursor speed	120 points/s
Positioning Accuracy	More than 90% of the touch area is ± 2 mm
communication interface	B-type USB male connector
Touch interface	Tempered Glass
Touch Frequency	Theoretical Infinite Times
Computer Response	Automatic recognition by the system; ≤ 8 ms
Driver	HID driver free
Touch function	Support 10 point computer touch operation Support image enlargement, reduction, and rotation
Characteristics of the whole machine	
Shell and Appearance	The body is made of metal coated cold-rolled steel plate with a surface of 3.5mmtemperedglass.
Colour	Standard black (silver, white optional)
Outline Dimension	749.6mm *444.1mm*71.4mm
Net Weight	10.5KG
Gross Weight	12.5KG
Working Voltage	AC110-220V
Maximum power consumption rate	≤ 130 W
Standby Power	≤ 2.5 W
Installation Method	Standard TV wall mount (mobile bracket optional)
Horn Specifications	10W/8 ohms x 2 speakers

Working Environment

Environmental parameters	Workplace	indoor
	Operation Temperature	0°C - 40°C
	Working humidity	10% -90% non condensing
	Storage Temperature	-20°C - 60°C
	Storage humidity	10% -90% non condensing

